

PRESSURE CONTROL VALVE



195 West Ryan Road
Oak Creek, WI 53154


414-764-7500
info@elwood.com

www.elwood.com/fluidpower.html

Features


- Simple, compact design consisting of top plate and body.
- Easily convert from relief to reducer or reducer to relief.
- Designed for either SAE flange or manifold mounting.
- All parts replaceable; reversible seat design for additional service life.
- Heat treated stainless steel internals.
- Standard adjustable orifice restrictor on all valves.
- Internal and external pilot feeds, drains, and gages connections located for flexibility and easy maintenance.
- Proportional pressure control option includes pilot head with proportional force controlled solenoid.

Pressure Control

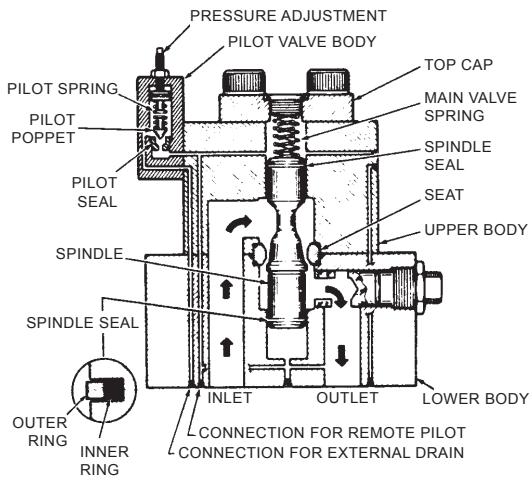


Reducer


Pressure Control

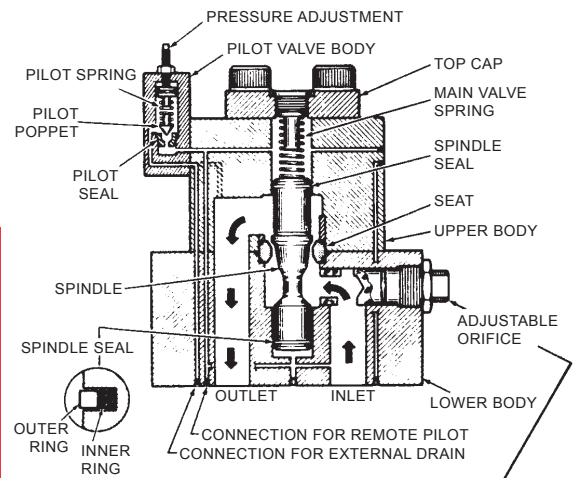

Relief




Proportional Pressure Control

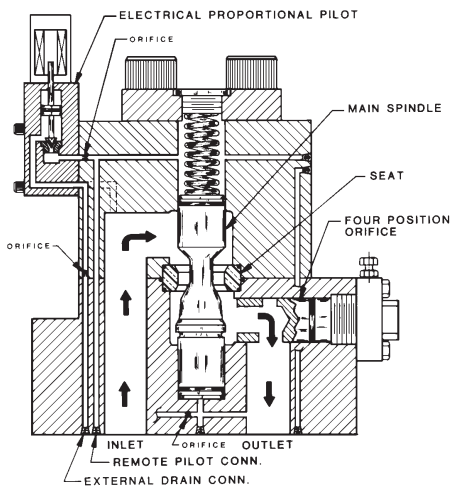

Reducer

Proportional Pressure Control

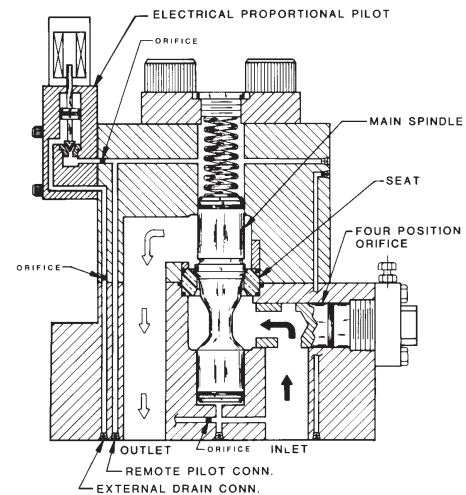

Relief

Operation & Functionality

Proportional Pressure Control

- Set system pressure using an electronic amplifier card, or adaptive control module.
 - Available in Open Loop or Closed Loop
 - Used with Pressure Transducer
 - Closed Loop used for extreme accuracy.
- System pressure is adjusted in relation to a current signal to the proportional solenoid.
- Pressure balance on the main spindle allows the spring to hold the valve in a closed position, for relief, and open for reducing.
- When system pressure working on the pilot poppet exceeds the solenoid force, pilot flow is established to the external drain.
- The adjustable orifice plug allows a pre-pressure drop to occur in the valve allowing the main spindle to create a larger opening in the sealing area, adding to the life of the valve.

Non-Proportional Pressure Control

- Set system pressure by adjusting the pilot relief control valve.
- Pressure balance on the main spindle allows the spring to hold the valve in a closed position, for relief, and open for reducing.
- When system pressure working on the pilot poppet exceeds the set pilot relief adjustment, pilot flow is established to the external drain.
- The adjustable orifice plug allows a pre-pressure drop to occur in the valve allowing the main spindle to create a larger opening in the sealing area, adding to the life of the valve.

| Technical Data | | Reducer | Relief | |
|---------------------|---------------------------------|---|---------------------------|--|
| Hydraulic Fluid | Fluid Media | HWCF, 97/3 Soluble Oil in Water, Synthetics, Mineral Oils, & Kerosene | | |
| | Viscosity Range at 100°F (38°C) | 20 SSU (1.2 Cst.) to 1,800 SSU (385 Cst.) | | |
| | Temperature | HWFC | 35° to 150°F (2° to 65°C) | |
| Mineral Oil | | 5° to 150°F (-15° to 65°C) | | |
| Pressure | Max. Operating Pressure | 6,000 PSI (414 bar) | | |
| | Max. Pressure Ratings | 1,500 PSI (103 bar) | | |
| | | 3,600 PSI (250 bar) | | |
| | | 6,000 PSI (414 bar) | | |
| | Min. Set Pressure | 1,500 PSI (103 bar) | 250 PSI (17 bar) | 300 PSI (21 bar) |
| 3,600 PSI (250 bar) | | 250 PSI (17 bar) | 450 PSI (31 bar) | |
| 6,000 PSI (414 bar) | | 500 PSI (34 bar) | 550 PSI (38 bar) | |
| Size & Flow Rate | Nominal Port Connection Size | P-Size 1/4" | - | 0 - 2 GPM (8 LPM) |
| | | A-Size 1/2" | 0 - 15 GPM (57 LPM) | 0 - 20 GPM (75 LPM) |
| | | C-Size 3/4" | 10 - 50 GPM (190 LPM) | 10 - 85 GPM (320 LPM) |
| | | D-Size 1-1/4" | 40 - 120 GPM (455 LPM) | 40 - 190 GPM (720 LPM) |
| | | E-Size 2" | 80 - 200 GPM (760 LPM) | 80 - 300 GPM (1,140 LPM) |
| | | F-Size 3" | 180 - 500 GPM (1,900 LPM) | 180 - 660 GPM (2,500 LPM) |
| | | G-Size 4" | 350 - 800 GPM (3,000 LPM) | 350 - 1,000 GPM (3,800 LPM) |
| Other | Recommended Filtration | 50-60 micron pilot filter provided | | |
| | Finishes | Black Oxide | | Good corrosion resistance |
| | | Stainless Steel | | Standard finish; Best corrosion resistance |

| Proportional Data | | #16 Solenoid | #20 Solenoid |
|----------------------------------|-----------------------------------|--|--------------|
| Electrical | Pressure Rating | 3,000 PSI | 6,000 PSI |
| | Type of Supply | Direct Current (DC) | |
| | Minimum Control Current | 150 mA | 175 mA |
| | Maximum Control Current | 1,400 mA | 1,600 mA |
| | Coil Resistance | 10.6 Ω | |
| | Coil Rating | Continuous | |
| | Max. Ambient Temperature | 175°F (79°C) | |
| Electrical Connection Insulation | Hirshmann Type DIN #43650 | | |
| | Exceeds NEMA Class B Requirements | | |
| Hydraulics | Repeatability | Closed Loop with Dither ± 10% | |
| | | Closed Loop with Dither ± 0.5% | |
| | | (± 0.07% with Electronic Adaptive Control) | |
| Hysteresis | with Dither ± 0.5% | | |
| Response Time / Step Change | 800 - 2,500 PSI (55 - 172 bar) | | |
| | 800 - 1,500 PSI (55 - 103 bar) | | |
| | 400 - 800 PSI (28 - 55 bar) | | |

195 West Ryan Road
Oak Creek, WI 53154


414-764-7500
info@elwood.com

www.elwood.com/fluidpower.html

Response Data


Definitions

1. Cracking Pressure - The point the main spindle first begins to open.
2. Response Time - The duration of time from when the set pressure is met as pressure increases, to when the set pressure is met as pressure decreases.
3. Pressure Over-Shoot - The amplitude of the peak pressure over the set pressure of the valve.
4. Recovery - The duration of time from the end of the response time to the stabilization at set pressure.
5. Pressure Override - The difference between full flow and cracking pressure.
6. Compound Relief Valve - A relief valve that operates in two (2) stages. The pilot stage contains the pressure-limiting valve; wherein, a poppet is held against the seat by an adjustable spring. The work port connections are made to the main body, and diversions of the full flow volume by the balanced spindle in the main body.
7. Balanced Spindle - During normal operation, this spindle is in hydraulic balance.

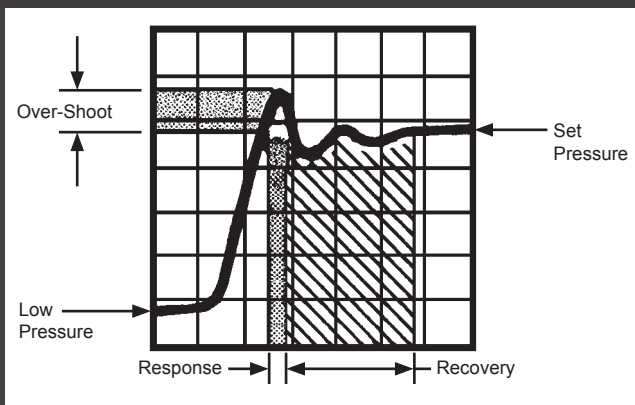

Typical oscilloscope reading of a relief valve, shown above. Elwood Pressure Control Valves testing has revealed the following:

- Over-shoot is approximately 10% greater than set pressure.
- Response time ranges between 50 and 100 milliseconds.
- Recovery time is normally within 150 milliseconds.
- Cracking pressure is approximately 10-12% below set pressure.

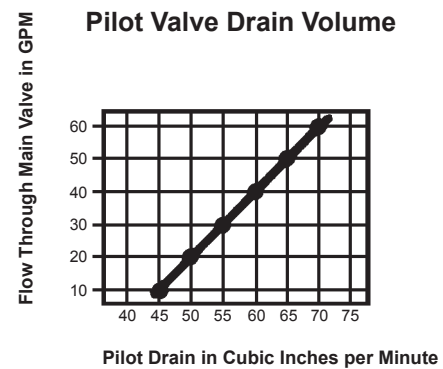

This graph illustrates the pilot valve drain volume that is typical of an Elwood Pressure Control Valve operating at a constant inlet pressure of 5,000 PSI.

Solenoid Power Draw Curve

Circuit:

- Test results shown reflect the pressure response time of the C-size Proportional Reducer/Relief Assembly reacting on a three (3) gallon volume of fluid.
- Input current supplied in a square waveform from a frequency generator.

Results:


- The graphs illustrate the current (Channel A) and pressure (Channel B) waveforms as displayed on a storage type oscilloscope.

Note:

- Test data shown is with a "C" size reducer at 2,500 PSI.
- It is recommended that the hydraulic supply pressure be maintained at a level of 15% higher than the maximum set pressure to obtain optimum performance from the valve.

INPUT CURRENT VS. PRESSURE

Model C, 3000 PSI, Size 16 Solenoid

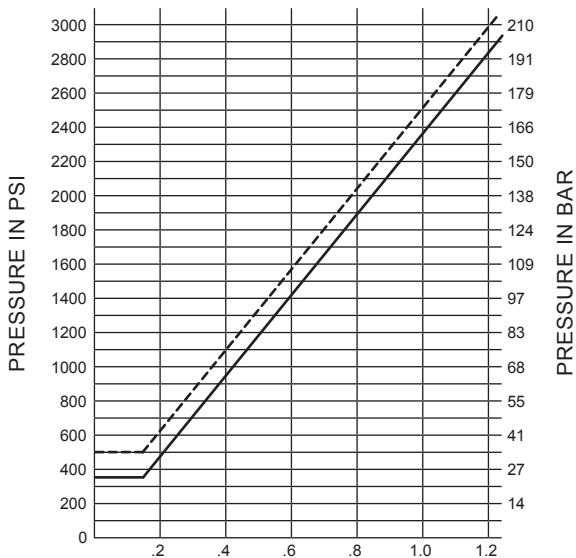

INPUT CURRENT IN AMPS


— Reducer Pressure response to current input

- - - Relief Pressure response to current input
(reflects differential adjustment of 150 PSI)

TYPICAL VALVE RESPONSE


Current Input From Sq. Wave Gen.

TEST #1

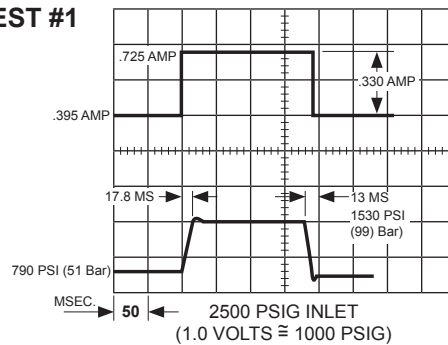

A: 0.2 VOLTS / DIVISION
B: 0.5 VOLTS / DIVISION

TEST #2

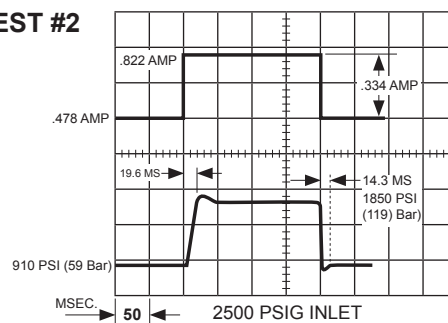

A: 0.2 VOLTS / DIVISION
B: 0.5 VOLTS / DIVISION

195 West Ryan Road
Oak Creek, WI 53154

414-764-7500
info@elwood.com

www.elwood.com/fluidpower.html


Open Loop Control

Description:

- The Model 9795-0003 accepts command signals in several formats and provides currents to operate the valve solenoid. The module is equipped with an integral power supply operating from the line voltage.
- An analog meter indicates the command signal in percent and the output current in amperes. The Model 9795-0003 provides output current proportional to the command signal.
- The model 9795-0003 can be sub-panel mounted, utilizing the Model 9795-0006 enclosure or may be rack mounted using the Model 9795-0007 enclosure.

Open Loop Specifications

| | |
|-----------------------------|------------------------------|
| Supply Voltage | 120/240 VAC, 50/60 Hz, 2/1 A |
| Output Current | 1 to 2 A |
| Command Signal | |
| Panel Potentiometer | 1 turn (270°), 5 kΩ |
| Remote Potentiometer | 10 turn, 5 kΩ |
| External Voltage Command | 0 to 10 V |
| CMRR | 60 dB at 60 Hz |
| Common Mode Voltage | 5 V |
| External Current Command | 0 to 50 mA |
| Frequency Response | 20 kHz |
| Indicators | |
| Command Signal Analog Meter | 0 to 100% |
| Output Current Analog Meter | 0 to 2 A |
| Power On | LED indicator |
| Size | 5.25" H x 4.25" W x 8" D |

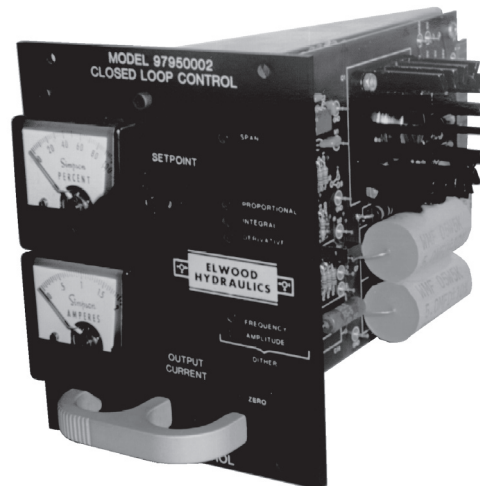

Closed Loop Specifications

| | |
|-----------------------------|--------------------------------|
| Supply Voltage | 120/240 VAC, 50/60 Hz, 2/1 A |
| Output Current | 1 to 2 A Command |
| Command Signal | |
| Panel Potentiometer | 1 turn (270°), 5 kΩ |
| Remote Potentiometer | 10 turn, 5 kΩ |
| External Voltage Command | 0 to 10 V |
| CMRR | 60 dB at 60 Hz |
| Common Mode Voltage | 5 V |
| External Current Command | 0 to 50 mA |
| Resolution | 1 PSI |
| Frequency Response | 20 kHz |
| Pressure Transducer | |
| Excitation | 10 VDC |
| Input Sensitivity | 30 mV full scale |
| Auxiliary Output | |
| Pressure | 0 to 10 VDC full scale at 5 mA |
| Indicators | |
| Command Signal Analog Meter | 0 to 100% |
| Output Current Analog Meter | 0 to 2 A |
| Power On | LED indicator |
| Size | 5.25" H x 4.25" W x 8" D |

Closed Loop Control

Description:

- The Model 9795-0002 accepts a command signal and provides current to operate the valve solenoid. The module is equipped with an integral power supply and operating from line voltage.
- An analog meter indicates the command signal in percent and the output current in amperes. The Model 9795-0002 provides a flow proportional to the common signal.
- The Model 9795-0002 can be sub-panel mounted, utilizing the Model 9795-0006 enclosure or may be rack mounted using the Model 9795-0007 enclosure.

Ordering Data - Pressure Control Relief & Reducing Valves

For Proportional Control Only

For Unloading Relief Only

| | | | | | |
|---------------------------|---|--------------|------------------------------|------------------------|----------------------------------|
| MODEL CODE EXAMPLE | [PR] - CRL - 3K - 3M - [6 - 11D] | | | | |
| | <i>Electrical Proportional</i> | <i>Model</i> | <i>Max. Working Pressure</i> | <i>Port Connection</i> | <i>Voltage Valve Accessories</i> |

ELECTRICAL PROPORTIONAL

| CODE NO. | DESCRIPTION |
|-----------|--------------------------------------|
| PR | Proportional Pressure Control 24 VDC |

Electrical proportional pressure control is optional.

MAXIMUM WORKING PRESSURE

| CODE NO. | DESCRIPTION |
|-------------|---------------------|
| 1.5K | 1,500 PSI / 105 BAR |
| 3K | 3,000 PSI / 210 BAR |
| 6K | 6,000 PSI / 415 BAR |

Custom pressures available upon request.

PORT CONNECTION SIZE

| CODE NO. | Connection Options | Valve Sizes Applicable | Connection Size |
|--|---|------------------------------|-----------------|
| 1M | M - Manifold Mounting | P-Size Valves PRL | 1/4" |
| 2M | M - Manifold Mounting NFPA P-06 Mounting | A-Size Valves ARL, ARD | 1/2" |
| 3M 3F61 3F62 | M - Manifold Mounting F61 - SAE Code 61 F62 - SAE Code 62 | C-Size Valves CRL, CRD, CURL | 3/4" |
| 5M 5F61 5F62 | M - Manifold Mounting F61 - SAE Code 61 F62 - SAE Code 62 | D-Size Valves DRL, DRD, DURL | 1-1/4" |
| 8M 8F61 8F62 | M - Manifold Mounting F61 - SAE Code 61 F62 - SAE Code 62 | E-Size Valves ERL, ERD, EURL | 2" |
| 12M 12F61 12F62 | M - Manifold Mounting F61 - SAE Code 61 F62 - SAE Code 62 | F-Size Valves FRL, FRD, FURL | 3" |
| 16M 16F61 16F62 | M - Manifold Mounting F61 - SAE Code 61 F62 - SAE Code 62 | G-Size Valves GRL, GRD, GURL | 4" |

Custom sizing & mounting connections available upon request.

MODEL

| TYPE | CODE NO. | DESCRIPTION | FLOW RANGE | |
|------------------|-------------|-------------------------------|--------------------------------|--------------------------|
| RELIEF | PRL | P-Size Relief Valve | 0 - 2 GPM 8 L/MIN | |
| | ARL | A-Size Relief Valve | 0 - 20 GPM 75 L/MIN | |
| | CRL | C-Size Relief Valve | 10 - 85 GPM 320 L/MIN | |
| | DRL | D-Size Relief Valve | 40 - 190 GPM 720 L/MIN | |
| | ERL | E-Size Relief Valve | 80 - 300 GPM 1,140 L/MIN | |
| | FRL | F-Size Relief Valve | 180 - 660 GPM 2,500 L/MIN | |
| | GRL | G-Size Relief Valve | 350 - 1,000 GPM 3,800 L/MIN | |
| | REDUCER | ARD | A-Size Reducing Valve | 0 - 15 GPM 57 L/MIN |
| | | CRD | C-Size Reducing Valve | 10 - 50 GPM 190 L/MIN |
| DRD | | D-Size Reducing Valve | 40 - 120 GPM 455 L/MIN | |
| ERD | | E-Size Reducing Valve | 80 - 200 GPM 760 L/MIN | |
| FRD | | F-Size Reducing Valve | 180 - 500 GPM 1,900 L/MIN | |
| GRD | | G-Size Reducing Valve | 350 - 800 GPM 3,000 L/MIN | |
| UNLOADING RELIEF | | CURL | C-Size Unloading Relief Valve | 10 - 50 GPM 190 L/MIN |
| | DURL | D-Size Unloading Relief Valve | 40 - 120 GPM 455 L/MIN | |
| | EURL | E-Size Unloading Relief Valve | 80 - 200 GPM 760 L/MIN | |
| | FURL | F-Size Unloading Relief Valve | 180 - 500 GPM 1,900 L/MIN | |
| | GURL | G-Size Unloading Relief Valve | 350 - 800 GPM 3,000 L/MIN | |

Custom sizes & specifications available upon request.

VOLTAGE 1

| | |
|-----------|--------------------|
| 1 | 6 VDC |
| 2 | 12 VDC |
| 3 | 24 VDC |
| 5 | 110 VDC |
| 6 | 110/120VAC 50/60Hz |
| 8 | 220/240VAC 50/60Hz |
| 9 | 410/460VAC 50/60Hz |
| 10 | 200VAC 50/60Hz |
| 11 | 440/480VAC 60Hz |
| 12 | 24VAC 50/60Hz |

VALVE ACCESSORIES 2

| CODE NO. | DESCRIPTION |
|------------|--|
| 11B | ELECTRICAL QUICK DISCONNECT MALE - INDUSTRIAL, 3-BLADE PATTERN |
| 11D | ELECTRICAL QUICK DISCONNECT MALE - DIN# 43650, 3-BLADE PATTERN |
| 11E | ELECTRICAL QUICK DISCONNECT MALE - BRAD HARRISON 3-PIN |

INDICATOR LIGHTS ARE STANDARD

REDUCING/RELIEVING PACKAGES

Pressure control reducing/relieving packages available in all sizes.

Standard package model codes:
 C-Size Package - PR-CRD/CRL-HB-3K-3M
 D-Size Package - PR-DRD/DRL-HB-6K-5M
 E-Size Package - PR-ERD/ERL-HB-6K-8M

Any size packages and mounting available upon request.

Notes

1 Codes 3, 6, & 8 are standard voltages. For non-standard voltages, please contact us!

2 Filter Block Assembly available as option code -27.

For custom specifications and non-standard voltages, please contact us! Our team at Elwood is happy to customize a valve to fit your requirements!

195 West Ryan Road
Oak Creek, WI 53154

414-764-7500
info@elwood.com

www.elwood.com/fluidpower.html



Elwood Fluid Power is proud to provide high pressure hydraulic valves and systems for water and other low viscosity applications. Traditionally, Elwood custom valves have been used in steel mills, aluminum mills, and petrochemical facilities across the world!

Today Elwood is expanding its markets into custom high pressure water or low viscosity applications across many industries. Contact us today to start talking with our team!

Water and Low Viscosity Hydraulics

2-, 3- & 4-Way Directional Control Valves

As one of the most fundamental components in hydraulic and pneumatic machinery, directional control valves are responsible for stopping, allowing, and changing direction of fluid flow from one or multiple sources.

Packed Spool 4-Way Directional Control Valves

Deliver precise valve control through air actuated function.

Pressure Control Valves

Named for their primary function, pressure control valves provide relief, reduce, or stop system pressure.

Isolation Valves

Utilize system maintenance with the ISO-Lock valve by isolating manifold mounted directional control valves without shutting the entire system down.

2-Way Valves

- Descaling applications
- Pump unloading & bypass applications
- Stop applications

Accumulator System Shut-Off Valves

As system pressure builds, this safety valve shuts off pressure when determined levels are reached.

Decoking Control Valves

Assisting the refinery industry since the late 1930's, Elwood's decoking control valves have come a long way. Support provided is for older Nordberg and Rexnord valves. Newer designs feature additional beneficial characteristics. Available in spindle and cartridge designs, customized to fit your needs.

Valve Stands & Manifolds

ELWOOD CORPORATE POLICY STATEMENT

It is the policy of Elwood to provide our customers with products that meet or exceed their expectations for performance, reliability and safety while ensuring compliance with applicable laws and regulations, and to continually improve all aspects of our business.



195 West Ryan Road 414-764-7500
Oak Creek, WI 53154 info@elwood.com
www.elwood.com/fluidpower.html