


**SF-SERIES | FOOD GRADE SERVO MOTORS**  
**M43x FRAME SIZE**

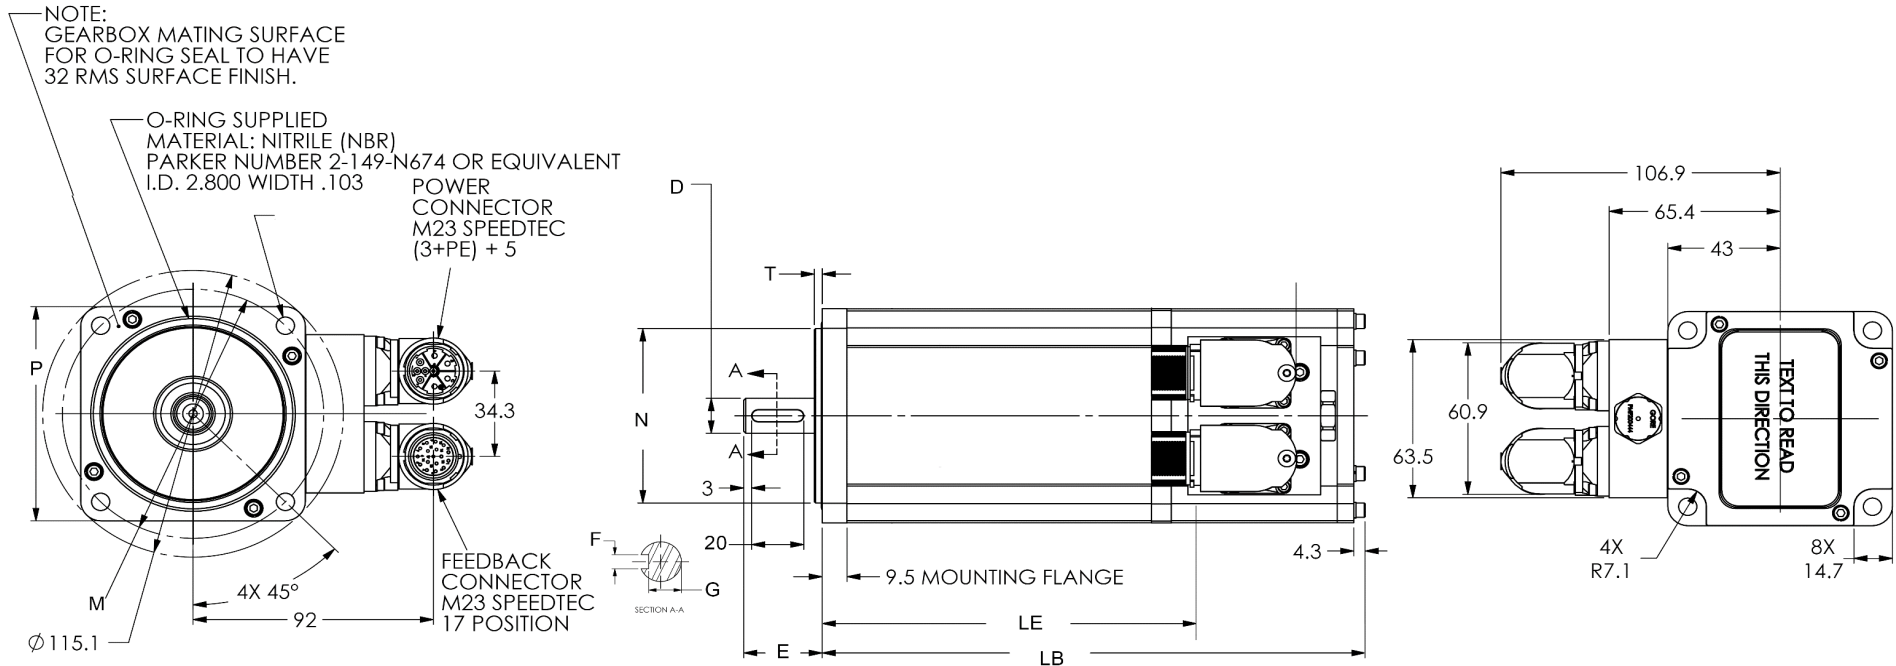

Model	Performance Data					Dimensions (mm)												
	Torque, Rated	Power, Cont.	Speed, Rated / Max	Torque, Peak	Inertia	Shaft Dia.	Shaft Ext.	Keyway	Keyway Depth	Mounting Bolt Circle	Pilot Dia.	Flange (Sq)	Mounting Hole	Overall Length	Length to Lead Exit	Pilot Height		
	Nm	W	RPM	Nm	kg·m <sup>2</sup> (x10 <sup>-4</sup> )	ØD	E	F	G	ØM	ØN	P	ØS	LB	LE	T		
M431-NN00-0KEN	1.03	593	5500	3.6	0.70000	14 k6	30	5x20	11	100	70 j6	86	7	211.5	151.5	3.0		
M431-NN00-2KEN	1.03	593	5500	3.6	0.70000	14 k6	30	5x20	11	100	70 j6	86	7	211.5	151.5	3.0		
M431-NN0B-0KEN	1.03	593	5500	3.6	0.87000	14 k6	30	5x20	11	100	70 j6	86	7	272.9	212.9	3.0		
M431-NN0B-2KEN	1.03	593	5500	3.6	0.87000	14 k6	30	5x20	11	100	70 j6	86	7	272.9	212.9	3.0		
M433-MN00-0KEN	1.34	631	4500	9.6	1.70000	14 k6	30	5x20	11	100	70 j6	86	7	249.6	189.6	3.0		
M433-MN00-2KEN	1.53	801	5000	9.5	1.70000	14 k6	30	5x20	11	100	70 j6	86	7	249.6	189.6	3.0		
M433-MN0B-0KEN	1.34	631	4500	9.6	1.80000	14 k6	30	5x20	11	100	70 j6	86	7	311	251	3.0		
M433-MN0B-2KEN	1.53	801	5000	9.5	1.80000	14 k6	30	5x20	11	100	70 j6	86	7	311	251	3.0		